


# Flex13™

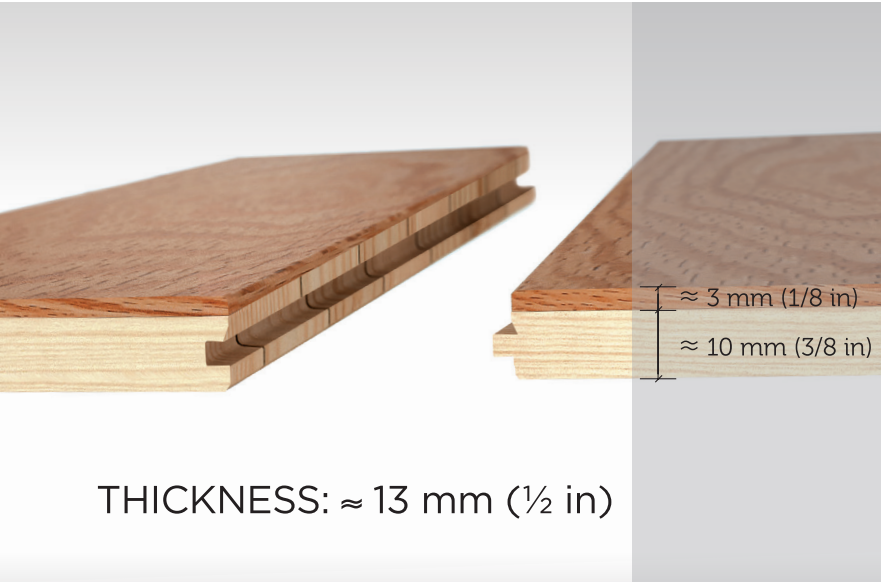

**REAL SAWN HARDWOOD  
TOP LAYER ON VERTICAL  
QUARTERSAWN SOFTWOOD  
FILLETED CORE**

**THICKNESS: ≈ 13 mm (1/2 in)**


## FEATURES & BENEFITS

Unique design adapts to small variations in sub-floor

Can be installed directly on dry concrete

100% made with local resources

## INSTALLATION AREAS

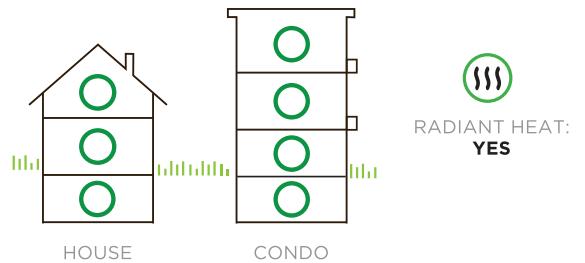

## AVAILABLE SPECIES



OAK



WHITE OAK



HARD MAPLE

## INSTALLATION METHODS



STAPLED



GLUED



FLOATING

**✓ AMONG THE BEST FLOORING OPTIONS FOR CARBON-NEUTRAL CONSTRUCTION!**

As confirmed by our Environmental Product Declaration (EPD) 8511-5112, Preverco floors are among the top performers in terms of environmental impact, from raw material sourcing to the product's end of life.

## SPECIFICATIONS

### Flex 13

THICKNESS:  13 mm (1/2 in)

WIDTH: 4 3/8 po  
5 1/8 in

LENGTH: Random lengths from 16 in to 84 in

Availability to be validated according to products

## AVAILABLE ACCESSORIES

- Maintenance Kit
- Reducer
- Quarter round
- Touch up pens
- Threshold
- Underlayments
- Stair Nosing
- "T" Molding

## APPLICABLE STANDARDS

SURFACE BURNING (ASTM-E-84):

- FSI (Flame-Spread index) 95 to 155 Class C (depending on species)
- SD (Smoke Development) 95 to 400 (depending on species)

SURFACE BURNING (ULC-S-102-2):

- FSV (Flame-Spread value) 65 to 155 (depending on species)
- SDC (Smoke Development Classification) 270 to 485 (depending on species)

CRITICAL RADIANT FLUX (ASTM-E-648-94A):

0,42 to 0,65 W/cm2 (depending on species)

FORMALDEHYDE EMISSION (ASTM-E-1333-02):

< 0,01 ppm

FORMALDEHYDE EMISSION (BS EN 120:1992):

1,5 mg/100 g (Class E1) (depending on species)

VOC TOTAL (ASTM-D-6670-01):

< 0.011 ppm (depending on species)

## RECOMMENDATIONS

Hardwood flooring should only be installed into environments where "normal living" conditions are possible (between 37% and 50% RH). Please consult our warranty and installation guide for further details.



FINISHES SATIN + MAT  
**35-year warranty** for residential application (see full warranty leaflet)

COMMERCIAL USE  
**3-year warranty** for light commercial applications (see full warranty leaflet)



Lacey Act  
compliant

LEED  
Rating System  
(Help fulfill credits for)

