

SolidClassic™



THICKNESS: ≈ 3/4 in (19 mm)

TRADITIONAL 19 MM (3/4 IN)
THICK SOLID WOOD FLOOR

FEATURES & BENEFITS

- 100% hardwood

- Random plank lengths for a more natural look

- Most varied selection

- Proven manufacturing processes

- Timeless product

- Long service life


- Excellent performance for narrower slats

- 100% made in Canada

AVAILABLE SPECIES



INSTALLATION AREAS

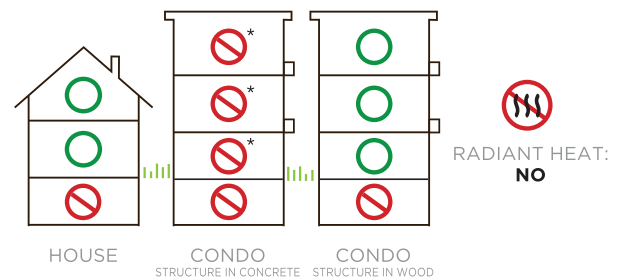

Installation on the ground floor and upstairs only.
Do not install in the basement or below grade.

* Never glue directly on concrete; a wood subfloor is required (see NWFA installation guide)

INSTALLATION METHODS



NAILED STAPLED

* Refer to the NWFA for the recommended underlayment membranes.

✓ AMONG THE BEST FLOORING OPTIONS FOR CARBON-NEUTRAL CONSTRUCTION!

As confirmed by our Environmental Product Declaration (EPD) 8511-5112, Preverco floors are among the top performers in terms of environmental impact, from raw material sourcing to the product's end of life. Global warming potential total (GWP) of that product is 1,14 kg CO₂ eq (including carbon sequestration).

SolidClassic^{MC}

SPECIFICATIONS

THICKNESS:  ≈ 3/4 in (19 mm)

WIDTH: 2 1/4 in, 3 1/4 in, 4 1/4 in and 5 in

LENGTH: Random

Availability to be validated accord to products.

AVAILABLE ACCESSORIES

- Maintenance Kit
- Touch up pens
- Stair Nosing
- Reducer
- Threshold
- "T" Molding
- Quarter round
- Underlayments

DESCRIPTION For more details, please refer to your Preverco dealer.	SOLIDCLASSIC			
	2 1/4" (57 mm)	3 1/4" (83 mm)	4 1/4" (108 mm)	5" (127 mm)
Quantity per box (sq.ft.)	20	20	19	22
Quantity per pallet (sq.ft.)	960	960	912	1 056
Quantity of boxes per pallet	48	48	48	48
Thickness	3/4" (19 mm) solid Important information for SolidClassic platform: for widths 4 1/4" (108 mm) AND 5" (127 mm): Width variation equal or less than 0.015" (0,38 mm) fall within manufacturing tolerance expectations. Example : for 4 1/4" (108 mm), 4.235" to 4.265" (107,62 to 108,38 mm) is accepted. Also, please note that wide boards are more likely to show cupping and shrinking problems.			
Herringbone specifications	n/a	n/a	15' sq. ft./box Fixed length of 21,25" 48 boxes / pallet	n/a

APPLICABLE STANDARDS

SURFACE BURNING (ASTM-E-84):

- FSI (Flame-Spread index) 95 to 155 Class C (depending on species)
- SD (Smoke Development) 95 to 400 (depending on species)

SURFACE BURNING (ULC-S-102-2):

- FSV (Flame-Spread value) 70 to 140 (depending on species)
- SDC (Smoke Development Classification) 270 to 485 (depending on species)

CRITICAL RADIANT FLUX (ASTM-E-648-94A):

0,42 to 0,65 W/cm2 (depending on species)

FORMALDEHYDE EMISSION (ASTM-E-1333-02):

< 0,01 ppm

FORMALDEHYDE EMISSION (BS EN 120:1992):

1,5 mg/100 g (Class E1) (depending on species)

VOC TOTAL (ASTM-D-6670-01):

< 0.011 ppm (depending on species)

ACOUSTIQUE (FIELD IMPACT INSULATION CLASS) :

FIIC 66 (depending on the floor–ceiling assembly)

RECOMMENDATIONS

Hardwood flooring should only be installed into environments where "normal living" conditions are possible (between 37% and 50% RH). Please consult our warranty and installation guide for further details.



FINISHES SATIN + MAT

35-year warranty for residential application (see full warranty leaflet)

COMMERCIAL USE

3-year warranty for light commercial applications (see full warranty leaflet)



Lacey Act
compliant

LEED
Rating System
(Help fulfill credits for)

